

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://twintex.nt-rt.ru/> || ttw@nt-rt.ru

Programmable Single Output DC Power Supplies




Product No : PPA8500_Series


Product Description

PPA series are high precision programmable DC power supply with auto range output, output power rated 400W, 800W and 1500W, maximum rated voltage up to 1200V. PPA series offer the widest range of output voltage and current at its rated power. One PPA power supply can cover output range of multiple power supplies. It offers powerful programming function through RS232 and RS485 interfaces, supporting SCPI and Modbus-RTU commands. And it is designed to meet both bench-top and integrated system applications. It is the most economical choice of power source to facilitate auto test and auto control.

- ★ Auto range output
- ★ High precision and high resolution
- ★ Over load, over voltage, over current, over temperature and reverse polarity protections
- ★ Constant voltage and constant current operations, auto CV and CC switch
- ★ Automatic continuous or dynamic load change
- ★ 1mVrms low ripple & noise
- ★ 4.3-inch backlit Segment LCD display
- ★ High speed rotary dial and keypad input
- ★ Built-in beeper alarm
- ★ Panel lock and output ON/OFF function
- ★ List mode function, 300 sets save & recall for voltage, current and time setups, easy use in auto test
- ★ Remote sense function
- ★ Display load resistance value
- ★ Battery charge mode
- ★ Standard RS-232 interface, support SCPI commands, support Labview
- ★ Standard RS-485 interface, support Modbus-RTU commands
- ★ Optional RS-232 to USB cable

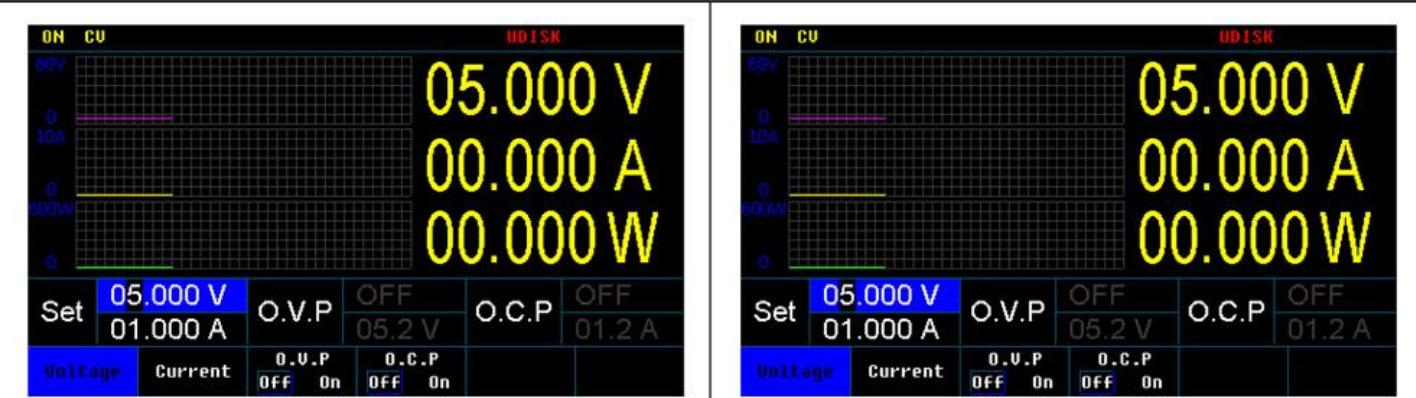


4.3-inch TFT LCD screen for full parameters and waveform display.

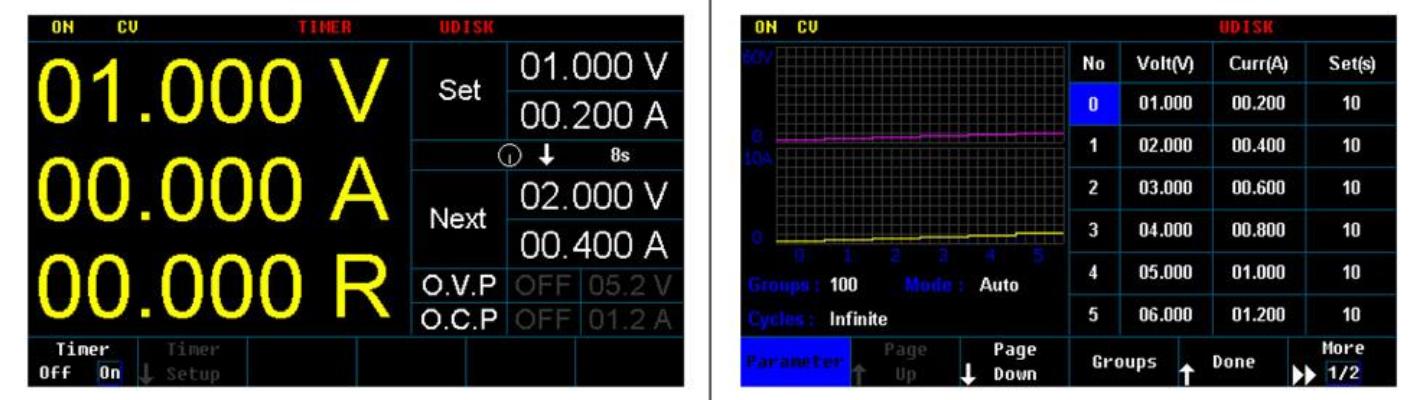

Set TIMER on to set running time, number of groups & cycle, and running mode.



Save & Recall settings

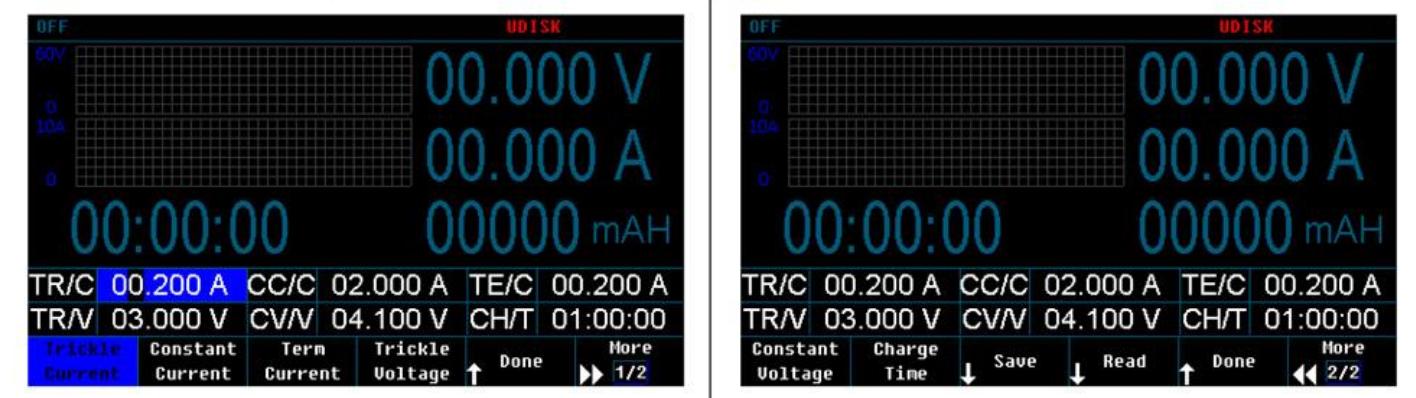

Settings for battery charge

Model		PPA850-35	PPA850-80	PPA850-150	PPA850-300	PPA850-600
Rated output (0°C~40°C)						
Voltage		0~35V	0~85V	0~155V	0~305V	0~605V
Current		0~111A	0~40.5A	0~20.5A	0~10.5A	0~5.5A
Power		850W	850W	850W	850W	850W
O.V.P		0.1~40V	0.1~90V	0.1~160V	0.1~310V	0.1~610V
O.C.P		0.1~112A	0.1~41.5A	0.1~21.5A	0.1~11.5A	0.1~6.5A
Constant Voltage Operation						
Line regulation		≤0.01%+5mV	≤0.01%+10mV	≤0.01%+30mV	≤0.01%+50mV	≤0.01%+50mV
Load regulation		≤0.01%+5mV	≤0.01%+10mV	≤0.01%+40mV	≤0.01%+100mV	≤0.01%+100mV
Recovery time		≤500us				
Rise time		≤300ms(empty load) ≤500ms(full load)		≤300ms(empty load) ≤1s(full load)		
Fall time		≤5s(empty load) ≤150ms (full load)		≤5s(empty load) ≤200ms (full load)	≤5s(empty load) ≤150ms (full load)	≤5s(empty load) ≤200ms (full load)
Ripple & Noise (20Hz-20MHz)		≤100mVpp	≤100mVpp	≤150mVpp	≤250mVpp	≤300mVpp
Temp. co-efficiency		≤100ppm				
Constant Current Operation						
Line regulation		≤0.1%+10mA				
Load regulation		≤0.1%+10mA				
Ripple & Noise (20Hz-20MHz)		≤150mA rms	≤50mA rms	≤30mA rms	≤40mA rms	≤30mA rms
Display						
Voltmeter		5 digits LCD display				
Ammeter		5 digits LCD display				
Setting resolution		1mV/10mA	1mV/1mA	10mV/1mA	10mV/1mA	10mV/1mA
Reading resolution		1mV/10mA	1mV/1mA	10mV/1mA	10mV/1mA	10mV/1mA
Setting accuracy	Voltage	±(0.01%rdg + 10mV)		±(0.03%rdg + 100mV)	±(0.03%rdg + 200mV)	
	Current	±(0.1%rdg + 60mA)	±(0.1%rdg + 10mA)			
Reading	Voltage	±(0.01%rdg +5mV)		±(0.02%rdg	±(0.02%rdg	

accuracy			+50mV	+100mV)			
	Current	±(0.1%rdg + 40mA)	±(0.1%rdg + 0.1%FS)				
General							
Protection	Over load, over voltage, over current, over temperature and reverse polarity protections						
Panel lock	Provided						
Remote sense function	Maximum compensation voltage 1V						
Battery charge	Lithium battery curve charge						
Interface	RS232interface, Support SCPI commands						
	RS485 interface, Support Modbus-RTU commands						
	External Trigger terminal						
Memory	300 sets						
Insulation	Between base and terminals: $\geq 100M\Omega / 500VDC$						
Operating environment	Indoor use		Altitude: $\leq 2000m$	Ambient temperature: 0~40°C			
	Relative humidity: $\leq 80\%$		Installation category: II	Pollution degree: 2			
Storage environment	-10°C~70°C, $\leq 70\%RH$						
Power source	AC110V $\pm 10\%$ or 220V $\pm 10\%$ 47~63Hz						
Accessories	Power cord x1, Operation manual x1, RS232 cable x1, Software CD x1						
Dimension	215Wx89Hx507D mm						
Weight	7.5kg						

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93