


TP3300 SERIES

0~32V / 0~3.2A x2

0~32V / 0~5.1A x2

FIXED

2.5, 3.3, 5V/3A

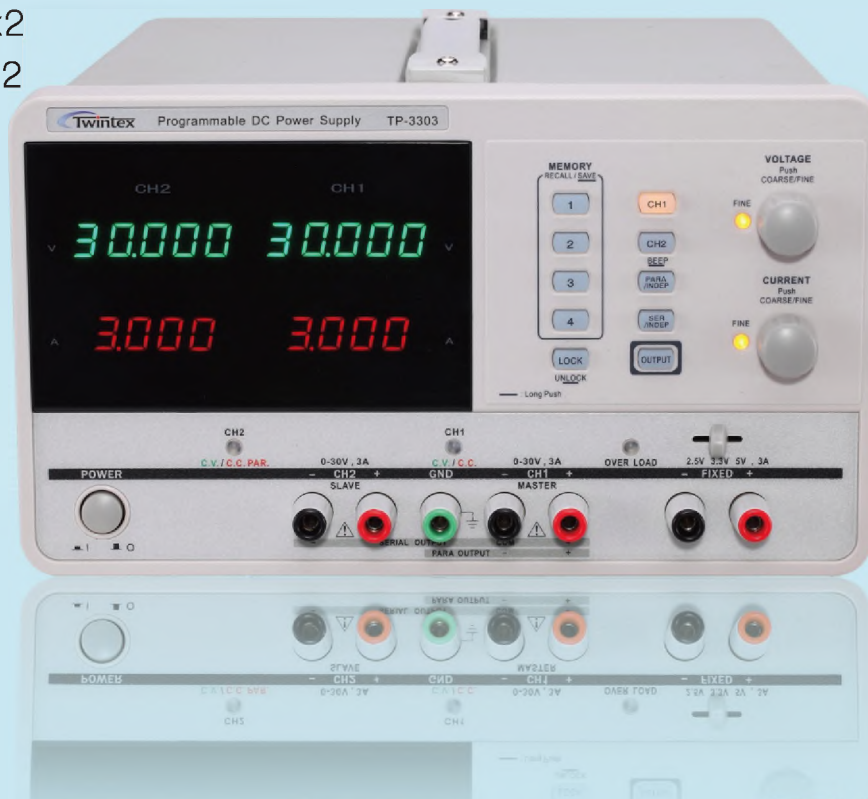

FEATURES

- Two independent adjustable outputs 0~32V/0~3.2A x2, 0~32V/0~5.1A x2
- One selectable output 2.5V, 3.3V, 5V/3A
- High resolution 1mV/1mA (TP-3303)
- Constant voltage and constant current operations, auto CV and CC switch
- Digital panel control, Coarse/Fine volume control for voltage and current
- 4 sets save & recall for panels settings, quick operation from panel
- Panel lock and output ON/OFF function
- Preset function, setting of voltage and current with output open circuit
- Auto Series and Parallel tracking operations
- Intelligent cooling fan control
- Standard USB interface for PC remote control (TP-3303/3303U/3305U)
- Support Labview (TP-3303/3303U/3305U)

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://twintex.nt-rt.ru/> || ttw@nt-rt.ru

SPECIFICATIONS

Model	TP-3303	TP-3303U	TP-3305U	TP-3303D	TP-3305D	TP-3303E	TP-3305D
Rated output (0°C~40°C)							
Output voltage	0~32V x2	0~32V x2	0~32V x2	0~32V x2	0~32V x2	0~32V x2	0~32V x2
Output current	0~3.2A x2	0~3.2A x2	0~5.1A x2	0~3.2A x2	0~5.1A x2	0~3.2A x2	0~5.1A x2
Constant voltage operation							
Line regulation	≤0.01%+3mV						
Load regulation	≤0.01%+3mV (I≤3A); ≤0.02%+5mV (I>3A)						
Ripple & Noise (5Hz~1MHz)	≤1mVrms (I≤3A); ≤2mVrms (I≤3A)						
Recovery time	≤100μs (50% load change, minimum load 0.5A)						
Constant current operation							
Line regulation	≤0.2%+3mA						
Load regulation	≤0.2%+3mA (I≤3A); ≤0.2%+5mA (I>3A)						
Ripple & Noise	≤3mArms (I≤3A); ≤6mArms (I>3A)						
Tracking operation							
Parallel	Line regulation	≤0.01%+3mV					
	Load regulation	≤0.01%+5mV (I≤3A); ≤0.02%+10mV (I>3A)					
Serial	Line regulation	≤0.01%+5mV					
	Load regulation	≤300mV					
	Tracking error	≤0.5%+10mV	≤0.5%+50mV	≤0.5%+50mV	≤0.5%+50mV	≤0.5%+100mV	≤0.5%+100mV
(No load; with load, add load regulation ≤300mV)							
Auxiliary output (fixed)							
Output voltage	2.5V, 3.3V, 5V (selectable), ±8%						
Output current	3A						
Line regulation	≤25mV						
Load regulation	≤25mV						
Ripple & Noise (5Hz~1MHz)	≤2mVrms						
Protection	Over load and reverse polarity protections						
Display							
Voltmeter	5 digits LED display			3 digits LED display			
Ammeter	4 digits LED display			3 digits LED display			
Resolution	1mV/1mA		100mV/10mA	10mV/10mA (0~9.99V) 100mV/10mA (10~30V)		100mV/10mA	
Setting accuracy (25±5°C) d: digits	Voltage	±(0.03%+10mV)		±(0.5%+2d)		±(0.2%+3d) (0~9.99V) ±(0.5%+2d) (10~30V)	
	Current	±(0.3%+10mA)		±(0.5%+2d) (I≤3A); ±(0.5%+5d) (I>3A)			
Reading accuracy (25±5°C) d: digits	Voltage	±(0.03%+10mV)		±(0.5%+2d)		±(0.2%+3d) (0~9.99V) ±(0.5%+2d) (10~30V)	
	Current	±(0.3%+10mA)		±(0.5%+3d) (I≤3A); ±(0.5%+5d) (I>3A)			
General							
Protection	Over load, voltage limit, current limit and reverse polarity protections						
Panel lock	Provided						
Interface	USB interface, support Labview			X		X	
Memory	4 sets						
Insulation	Between base and output terminal: ≥20MΩ/500VDC						
	Between base and AC power cord: ≥30MΩ/500VDC						
Operating environment	Indoor use		Altitude: ≤2000m		Ambient temperature: 0~40°C		
	Relative humidity: ≤80%		Installation category: II		Pollution degree: 2		
Storage environment	-10°C~70°C, ≤70%RH						
Power source	AC110V/220V±10% selectable, 50/60Hz						
Accessories	Power cord x1, Operation manual x1, USB cable & Software CD (only for TP-3303/3303U/3305U)						
Dimension (WxHxD)	250x150x310mm						
Weight	8kg	7.5kg	8.5kg	7.5kg	8.5kg	7.5kg	8.5kg

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93