


APS

Features

- ✓ Full range adjustable output: Low 1-150V, High 150.1~300V, resolution 0.1V
- ✓ Output frequency: 45-250Hz
- ✓ Fast output key for 110V/220V and 50Hz/60Hz
- ✓ Panel lock function
- ✓ 3 sets memories for voltage and frequency settings
- ✓ Unlimited rotary knob for voltage and frequency adjustment, minimum step 0.001
- ✓ Strong overload capacity, overload 300% within 2s
- ✓ Withstand transient current 1.5 times of rated current within 0.1s
- ✓ Response time less than 20ms for 100% load and unload
- ✓ 5 digits high accuracy LED display for voltage, current, frequency, active power, power factor
- ✓ With soft-start function, set voltage rise time (0~99.999s), avoid damage by surge current during load start-up
- ✓ Over load, over current, over temperature and short circuit protections
- ✓ RS232 interface (APS51 Series)

Product photo

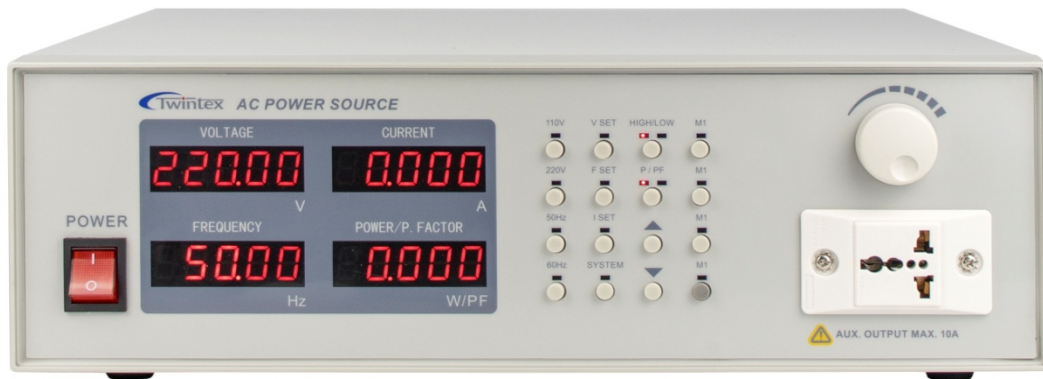

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://twintex.nt-rt.ru/> || ttw@nt-rt.ru

Specifications

Model	APS-5000A	APS-5000B	APS-5000C	APS-51005	APS-5101	APS-5102	APS-5103	
Capacity	350VA	700VA	1200VA	500VA	1KVA	2KVA	3KVA	
Circuit mode	IGBT/SPWM							
Input	1φ2W, 110V/220V±10%, 47-63Hz							
Output								
Phase	1φ2W							
Voltage	Phase voltage 1.0V-150.0V, Line voltage 1.0-260.0V Phase voltage 150.1V-300.0V, Line voltage 260.1V-520.0V							
Frequency	45-250Hz, step 0.1Hz							
Max. current	L=120V	3A	6A	10A	4.2A	8.4A	16.8A	25A
	H=240V	1.5A	3A	5A	2.1A	4.2A	8.4A	12.5A
Load regulation	≤1%							
Line regulation	≤1%							
Harmonic distortion	≤2% (resistive load, L=120V, H=240V)							
Frequency stability	≤0.01%							
Crest factor	1.41±0.10							
Efficiency	≥75%							
Response time	Max. 20ms							
Frequency resolution	0.01Hz							
Voltage resolution	0.01V							
Current resolution	0.001A			0.0001A		0.001A		
Power resolution	4 digits LED, resolution 0.001W /0.001kW							
Power factor resolution	3 digits LED, resolution 0.01							
Measuring accuracy	Voltage	±0.5%full scale +5 digit						
	Current	±0.5%full scale +5 digit						
	Frequency	±0.01%full scale +5 digit						
	Power	±0.5%full scale +5 digit						
Setting accuracy	Voltage	±1%full scale						
	Frequency	±0.1%full scale						
Communication interface	N/A			RS232				
Preset function	Preset output voltage, output frequency							
Fast key function	Fast key for 110V, 220V, 50Hz, 60Hz							
Alarm function	Audible and visual alarm once protective device activated; display error code on LED							
Protection	Fast-response circuit to detect over current, over load, over temperature and short circuit; Output will be shut down in protection mode.							
Cooling	Cooling fan							
Operation environment	0°C-40°C, ≤90% RH(Non-condensing), Altitude: 2000 feet							
Dimension (mm)	365Wx145Hx450D			430Wx133xH480D		430Wx222Hx480D		
Weight (kg)	13.5	14.5	18	16.5	21	30	33	

Specifications are subject to change without prior notice.

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://twintex.nt-rt.ru/> || ttw@nt-rt.ru